



Jecor Lights, we as a manufacturing company specialization in lighting & lighting fixture products has constantly looked forward in cutting edge products and advanced technologies in the market.

Our range of solutions are crafted after first understanding the customer's requirements and then using the best in class infrastructure and technology to create products that effectively address those needs.

Taking best solutions as our starting point, we are constantly involved in the development of daring and positive business activities. It is our aim to continue to provide our customers with the very best in cutting-edge solutions. We will continue to grow as a top class specialized technology manufacturing company that provides top class products incorporating the most innovative technology expertise and information with excellent coordination skills and global support systems.

Beauty and aesthetics are also important to address the modern day requirements and satisfaction of our customers! The package of solutions that we provide will certainly give you satisfaction and peace of mind and an experience of smart energy usage!

**BRANCHES : JODHPUR, AHMEDABAD, INDORE, PUNE,
JALGAON, NAGPUR, AMRAVATI, JAIPUR, GURUGRAM**



DEVARSHI INDUSTRIES PRIVATE LIMITED

Plot No. 68, Daman Ganga Indl. Estate, Dungri Faliya, Dharampur Road, Vapi - 396 191.

☎ : 9909913147 / 9909926751 ✉ : jecorlights@gmail.com

Customer care : +91-8000423464



Mfg. all type of LED LIGHT & FIXTURES



Shine Brighter.....

Model	JLB3	JLB5	JLB7	JLB9	JLB12
Input Power	3W	5W	7W	9W	12W
Luminous Intensity	300	500	700	900	1200
Input Voltage	90-265VAC,50Hz				
Correlated Color Temperature	3000-6500k				
CRI	More than 80				
Finish	Power Coated / Colour - White				
Operating Temperature	(-20 deg to 50 deg centigrade)				
Application	Home Lighting, Offices, Workshops, Various indoor use				

LED BULB




Model	JTB10	JTB12	JTB15
Input Power	10W	12W	15W
Luminous Intensity	1000	1200	1500
Input Voltage	90-265VAC,50Hz		
Correlated Color Temperature	3000-6500k		
CRI	More than 80		
Swivelling body action	Both Side 90deg Vertically & 35deg Horizontally		
Finish	Power Coated / Colour - White		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Application	Home Lighting, Offices, Workshops, Various indoor use		

LED T-BULB



Model	JLTL9	JLTL18	JLTL24
Input Power	9W	18W	24W
Lumens	900	1800	2400
Input Voltage	90-265VAC,50Hz		
Correlated Color Temperature	3000-6500k		
CRI	More than 80		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Application	Home Lighting, Offices, Workshops, Working Tables, Parking Lighting		

LED TUBE LIGHTS -T5/T8

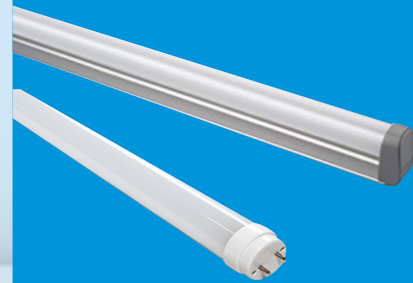

Shine Brighter.....

Technical Specification								
MODEL	JSL15P	JSL24P	JSL36P	JSL45P	JSL60P	JSL80P	JSL100P	JSL120P
Input Power (Wattage)	15W	24W	36W	45W	60W	80W	100W	120W
Lumens (110Lm/Watt)	1500	2400	3600	4500	6000	8000	10,000	12,000
Rated Working Voltage	90-265VAC,50Hz- Constant Current output							
Beam Angle	135 Degree							
Correlated Color Temperature	3000 - 6500K							
CRI	up to 85							
LED Type	High efficiency - Long life - High power LED							
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)							
LED Life	>50,000Hrs.							
Operating Temperature LED	(-20 deg to 50 deg centigrade)							
Housing	Pressure Die Casting							
Diffuser	PC Diffuser 4mm							
Ingress Protection	Up to IP 66							
Application	Street lighting/Garden lighting/Campus lighting							
Customization	Available Up to 150 w in both PDC & Extruded Aluminium Body							

LED STREET LIGHT



Technical Specification								
MODEL - MULTI LED	JFL10PM	JFL20PM	JFL30PM	JFL50PM	JFL70PM	JFL100PM	JFL150PM	JFL200PM
Input Power (Wattage)	10W	20W	30W	50W	70W	100W	150W	200W
Lumens (110Lm/Watt) - Multi	1000	2000	3000	5000	7000	10000	15000	20000
Rated Working Voltage	90-265VAC,50Hz - Constant Current output							
Beam Angle - Multi	120 Degree							
Correlated Color Temperature	3000 - 6500K							
CRI	up to 85							
LED Type	High efficiency - Long life - High power LED							
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)							
LED Life	>50,000Hrs.							
Operating Temperature LED	(-20 deg to 50 deg centigrade)							
Housing	Pressure Die Casting							
Diffuser	Toughened glass 4mm							
Mounting	C Type Mounting Bracket / PDC Frame							
Ingress Protection	Up to IP 66							
Application	Yard - Outdoor lighting							

LED ECO FLOOD LIGHT



Technical Specification					
MODEL	JHB50HM	JHB80HM	JHB100HM	JHB150HM	JHB200HM
Input Power (Wattage)	50W	80W	100W	150W	200W
Lumens (100Lm/Watt)	5000	8000	10000	15000	20000
Rated Working Voltage	90-265VAC,50Hz - Constant Current output				
Correlated Color Temperature	3000 - 6500K				
LED Type	High efficiency - Long life - High power LED				
LED Life	>50,000Hrs.				
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)				
Operating Temperature LED	(-20 deg to 50 deg centigrade)				
Housing	Extruded Section as heat sink & Casting Aluminium Control Gear Box				
Lens	PC Material				
Beam Angle - Multi Highbay	60/90 Degree				
Mounting	'I' Bolt provided for Hanging				
Ingress Protection	Up to IP 65				
Application	Industrial Shed / Factories/ Workshop				

LED HIGHBAY LIGHT






Shine Brighter.....


Models	JIF36	JIF45	JIF60	JIF90
LED Walthage	36W	45W	60W	90W
Lumens	3600	4500	6000	9000
Housing	CRCA			
Finish :	Epoxy Powder Coated			
Diffuser Closure	Milky White Acrylic glare Free illumination.			
Outer Dimensions	150 x 1200mm		300 x 1200mm	
Power Supply Driver	Constant current with Power factor >0.95 and THD<10%			
Light Source	MID POWER LED			
Input Voltage	90-265VAC,50Hz			
Color Temp (CT)	4000-6500k			
CRI	More than 80			
Life	50,000 burning hrs			
Application	Industrial Shed / Factories / Workshop			

LED INDUSTRIAL FIXTURES




Models	JLP20	JLP25	JLP36	JLP45
LED Walthage	20W	25W	36W	45W
Lumens	2000	2500	3600	4500
Housing	Alluminium			
Finish :	Epoxy Powder Coated			
Diffuser Closure	Milky White Acrylic glare Free illumination.			
Outer Dimensions	75 x 1200mm			
Power Supply Driver	Constant current with Power factor >0.95 and THD<10%			
Light Source	MID POWER LED			
Input Voltage	90-265VAC,50Hz			
Color Temp (CT)	4000-5700k			
CRI	More than 80			
Life	50,000 burning hrs			
Application	Industrial Shed / Factories / Workshop			

LED LINEAR PROFILE

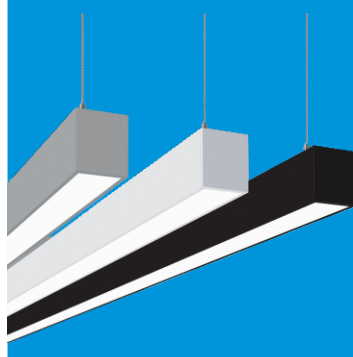

Models	JLP20	JLP25	JLP36	JLP45
LED Walthage	20W	25W	36W	45W
Lumens	2000	2500	3600	4500
Housing	Alluminium			
Finish :	Epoxy Powder Coated			
Diffuser Closure	Milky White Acrylic glare Free illumination.			
Outer Dimensions	75 x 1200mm			
Power Supply Driver	Constant current with Power factor >0.95 and THD<10%			
Light Source	MID POWER LED			
Input Voltage	90-265VAC,50Hz			
Color Temp (CT)	4000-5700k			
CRI	More than 80			
Life	50,000 burning hrs			
Application	Industrial Shed / Factories / Workshop			

LED LINEAR PROFILE SHAPE

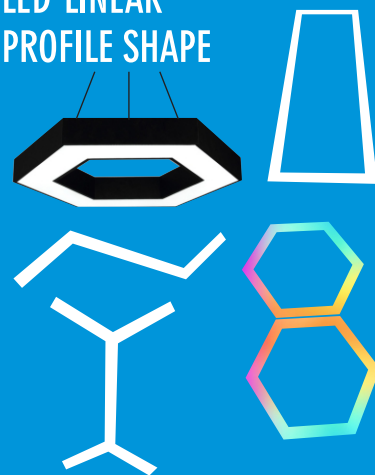

Shine Brighter.....

MODEL	JPLSE4R	JPLSE8R	JPLSE12R	JPLSE15R	JPLSE18R	JPLSE22R
Input Power	4W	8W	12W	15W	18W	22W
Outer Size (mm)	75 x 75	100 x 100	150 x 150	160 x 160	175 x 175	220 x 220
Cutout Size (mm)	60 x 60	85 x 85	135 x 135	145 x 145	160 x 160	205 x 205
Lumens	400	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting Frame					
Operating Temperature LED	(-20 deg to 50 deg centigrade)					
Mounting	Recess					
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls					

RECESS MOUNTED EDGELITS



Product Code	JPLRE4R	JPLRE8R	JPLRE12R	JPLRE15R	JPLRE18R	JPLRE22R
Input Power	4W	8W	12W	15W	18W	22W
Outer Size (mm)	75	100	150	160	175	220
Cutout Size (mm)	60	85	135	145	160	205
Lumens	400	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting Frame					
Operating Temperature LED	(-20 deg to 50 deg centigrade)					
Mounting	Recess					
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls					

RECESS MOUNTED EDGELIT ROUND



MODEL	JPLSE4S	JPLSE8S	JPLSE12S	JPLSE15S	JPLSE18S	JPLSE22S
Input Power	4W	8W	12W	15W	18W	22W
Outer Size (lxwxh) mm	85 x 85 x 50	110 x 110 x 50	160 x 160 x 50	170 x 170 x 50	185 x 185 x 50	230 x 230 x 50
Luminous Intensity	400	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting Frame					
Operating Temperature	(-20 deg to 50 deg centigrade)					
Mounting	Surface					
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls					

SURFACE MOUNTED EDGELITS SQUARE



MODEL	JPLR4S	JPLR8S	JPLR12S	JPLR15S	JPLR18S	JPLR22S
Input Power	4W	8W	12W	15W	18W	22W
Outer Size (OD xh-mm)	85 x 50	110 x 50	160 x 50	170 x 50	185 x 50	230 x 50
Lumens	400	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting Frame					
Operating Temperature	(-20 deg to 50 deg centigrade)					
Mounting	Surface					
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls					

SURFACE MOUNTED EDGELIT ROUND





Shine Brighter....

Product Code	JTL8C	JTL15C	JTL22C
Input Power	8W	15W	22W
Lumens	800	1500	2200
Input Voltage	90-265VAC,50Hz		
Power Factor	0.95		
Correlated Color Temperature	3000-6500k		
CRI	More than 80		
Finish	Powder Coated / Colour - White		
Housing	Pressure Die Casting Frame		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Mounting	Recess		
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls		

TRACK LIGHT



Models	JDL58R	JDL15R	JDL22R
Input Power	8W	15W	22W
Lumens	800	1500	2200
Input Voltage	90-265VAC,50Hz		
Power Factor	0.95		
Correlated Color Temperature	3000-6500k		
CRI	More than 80		
Finish	Powder Coated / Colour - White		
Housing	Pressure Die Casting Frame		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Mounting	Recess		
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls		

RECESS MOUNTED SQUARE DOWN LIGHT



Product Code	JDLR8R	JDLR15R	JDLR22R
Input Power	8W	15W	22W
Lumens	800	1500	2200
Input Voltage	90-265VAC,50Hz		
Power Factor	0.95		
Correlated Color Temperature	3000-6500k		
CRI	More than 80		
Finish	Powder Coated / Colour - White		
Housing	Pressure Die Casting Frame		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Mounting	Recess		
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls		

RECESS MOUNTED ROUND DOWN LIGHT



Shine Brighter....

Code	JCR-TO/BO-36W-45W - 60W
Housing	CRCA
Finish :	Epoxy Powder Coated
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Ingress Protection	up to IP65
Light Configuration	Backlit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Wavelength	36W/45W/60W
Lumen Per Watt	100 lm/W
Lumens	3600lm/4500lm/6000lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping malls

LED CLEAN ROOM



Code	JSPO-R-36W
Housing	Extruded Aluminium Sections
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Light Configuration	Edgelit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Wavelength	36W
Lumen Per Watt	100lm/W
Lumens	3600lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping malls

LED SLIM PANEL OFFICE LIGHT



Code	JOL-R-36W-45W - 60W
Housing	CRCA
Finish :	Epoxy Powder Coated
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Light Configuration	Backlit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Wavelength	36W/45W/60W
Lumen Per Watt	100 lm/W
Lumens	3600lm/4500lm/6000lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping malls

LED OFFICE LIGHT

